



55VW25E

55" LCD VIDEO WALL

Hisense's new VW25E Series LCD Video Wall provide users an almost seamless visual experience thanks to our extremely narrow bezel that let your content vividly stands out. It is powerfully designed for a host of everyday scenarios - from monitoring centers to conference rooms, from command centers to shopping malls, and so much more. Hisense LCD Video Wall captivate you with vivid visuals, leveraging our superb technologies such as picture enhancement technology, wide viewing angles, and anti-glare etc. With VisionInfo built-in, VW25E Series brings together content management and remote device management at anytime from anywhere.

Highlights



Advanced 4K Chip

Powered by an advanced 4K chip, VW25E series are capable of decoding 4K 60hz video without any additional controllers.



Android 11

Smart OS allows you to install third party apps as per your needs, and update your video walls through OTA, which make your video walls smart, effective and user friendly.



Ultra-Narrow Bezel Design

An ultra-narrow 2.9mm bezel-to-bezel width (1.8 mm(T/L), 1.1mm (B/R)) offers a seamless picture to provide an eye-catching visual experience, which allows the display to fit into any business environment.



Landscape and Portrait Display

VW25E offers great convenience by providing consistent visual quality both in landscape and portrait modes, which help to elevate your business.




Anti-Glare 25% Haze

25% haze panels help reducing reflections without adversely affecting the image quality, making sure the critical information are always visible and it can also improve the perceived contrast ratio of the display.



Unlimited Daisy Chain

Hisense LCD video walls support daisy chain without quantity limit. No need for video splitters, you can use common HDMI cables to connect the video walls together effortlessly.

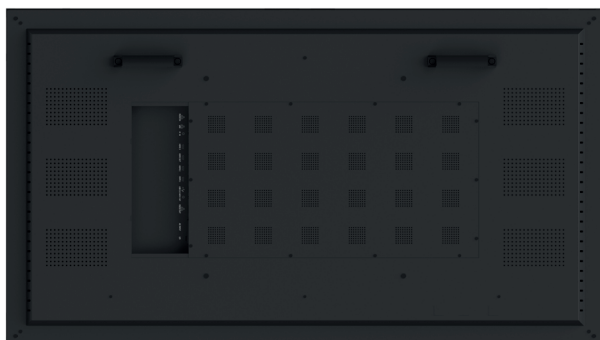

Specifications

Display

Backlight Type	DLED
Type	ADS
Size	55"
Resolution	1920 x 1080
Refresh Rate	60Hz
Colour Depth	16.7M(8 Bits)
Brightness(Typ.)	500 nits
Contrast Ratio(Typ.)	1200:1
Response Time(Typ.)	8ms
Viewing Angle(Min.)	178°/178°
Colour Gamut(Typ.)	72% NTSC
Haze	25%
Orientation	Landscape & Portrait
MTBF	50,000 hrs
Operation Hours	24 x 7

System

Operating System	Android 11
Processor CPU	ARM Cortex-A55 Quad Core
Processor GPU	Mali-G52
Memory	2G DDR4
Storage	16G EMMC
Language	Simplified Chinese, English, French, German, Polish, Spanish, Russian, Italian, Finnish, Norwegian, Swedish, Hebrew, Arabic, Thai, Malay, Indonesian, Catalan

Environment

Operating Temperature	0°C ~ 40°C
Operating Humidity	10% ~ 80%, non-condensing

Connectivity

Input	HDMI(2.0) x3 USB2.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x1 IR(2.5mm) x1
Output	HDMI x1 Audio(3.5mm) x1 RS232(RJ45) x1
Speaker (Built-in)	w/o

Power

Power Supply	AC 100~240V, 50/60Hz
Power Consumption(Typ.)	145W
Power Consumption(Max.)	200W
Standby Consumption	less than 0.5W (Standby Mode)

Physical


Bezel Colour	Black
Set Dimension (W x H x D)	1213 X 684 X 84mm (Not including Handle)
Packing Dimension (W x H x D)	1352 x 844 x 234mm
Bezel Width (T/L/R/B)	1.8 / 1.8 / 1.1 / 1.1mm
Net Weight	27kg
Gross Weight	36.2kg
VESA Mount	400 x 400mm, 4-M6 Screw
Accessories	Quick Setup Guide / Power Cord / Remote Control & Batteries(AAA)×2 / RS232 Converter Cable / IR Cable

Certification

CB CE

Standard	CB / CE / UKCA / ERP / South Africa Energy Efficiency
EMC	Class A
Safety	62368-1

Display Dimensions

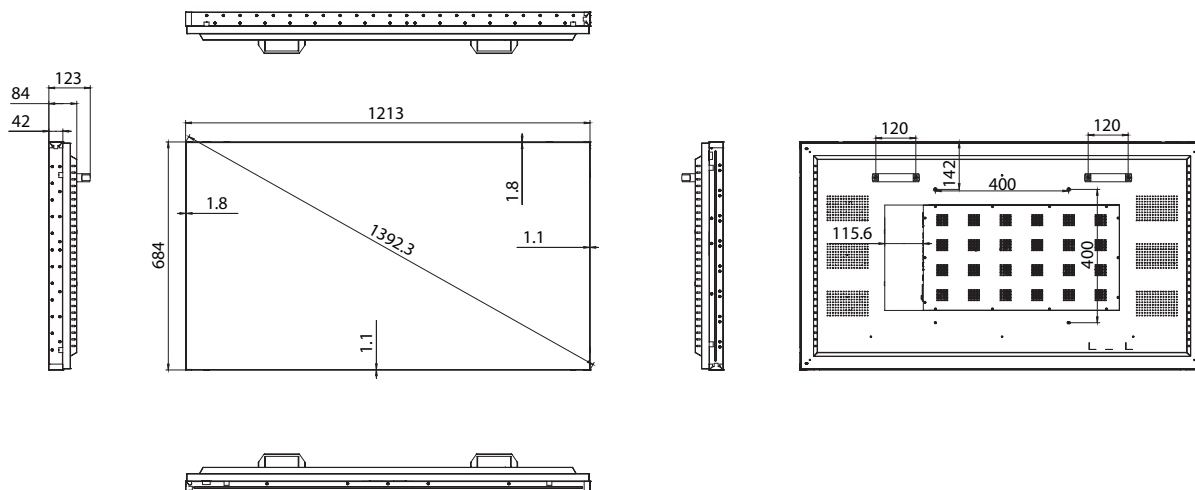

Product specifications may vary per region, and specifications are subject to change. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

Learn More: www.hisense-b2b.com | Contact Us: sales@hisense-b2b.com

[in](#) @Hisense B2B Europe | @Hisense B2B USA | @Hisense B2B MENA | @Hisense B2B Indonesia | @Hisense B2B South Africa | @Hisense B2B Australia

Hisense | COMMERCIAL DISPLAY